



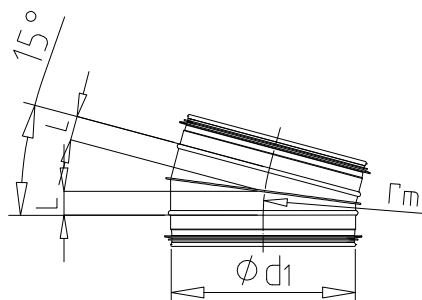

## Beispiel für einen Produktcode

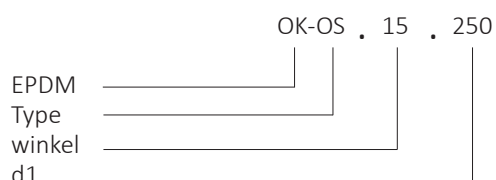

| Ød<br>(mm) | L<br>(mm) | m<br>(kg) | Segment-<br>menge | VPE |
|------------|-----------|-----------|-------------------|-----|
| 200        | 33        | 0,39      | 2                 | 24  |
| 224        | 36        | 0,45      | 2                 | 30  |
| 250        | 38        | 0,69      | 2                 | 24  |
| 280        | 41        | 0,80      | 2                 | 16  |
| 300        | 45        | 0,87      | 2                 |     |
| 315        | 46        | 0,95      | 2                 | 28  |
| 355        | 48        | 1,11      | 2                 | 24  |
| 400        | 53        | 1,44      | 2                 | 15  |
| 450        | 59        | 2,07      | 2                 | 12  |
| 500        | 67        | 2,40      | 2                 | 10  |
| 560        | 74        | 2,98      | 2                 |     |
| 630        | 83        | 3,53      | 2                 |     |
| 710        | 93        | 6,07      | 2                 |     |
| 800        | 105       | 7,21      | 2                 |     |
| 900        | 118       | 8,58      | 2                 |     |
| 1000       | 132       | 12,23     | 2                 |     |
| 1120       | 147       | 14,48     | 2                 |     |
| 1250       | 165       | 17,11     | 2                 |     |

## Beschreibung

Segmentbogen mit Einzel- oder Doppellippen-  
 dichtungs-ausrüstung (EPDM)

Standardradius:  $r = 1 \cdot d$

Dichtheitsklasse D nach DIN EN 12237

Rohrabbmessungen und Toleranzen nach EN 1506

