


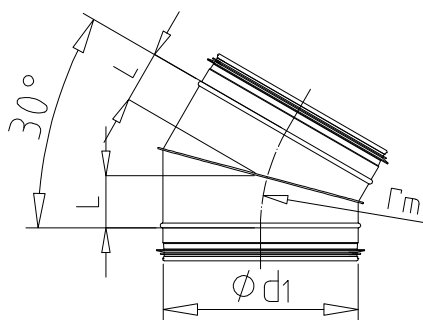

Beispiel für einen Produktcode

OK-OS . 30 . 250

EPDM _____
 Type _____
 winkel _____
 d1 _____

Ød (mm)	L (mm)	m (kg)	Segment- menge	VPE
200	54	0,51	2	36
224	60	0,60	2	24
250	68	0,90	2	36
280	76	1,06	2	30
300	81	1,18	2	
315	85	1,28	2	20
355	96	1,54	2	15
400	108	1,98	2	10
450	122	2,89	2	20
500	135	3,41	2	
560	151	4,25	2	
630	170	5,13	2	
710	191	8,78	2	
800	215	10,65	2	
900	242	12,93	2	
1000	269	18,28	2	
1120	301	22,06	2	
1250	337	26,56	2	

Beschreibung

Segmentbogen mit Einzel- oder Doppellippen-
 dichtungs-ausrüstung (EPDM)

Standardradius: $r = 1 \cdot d$

Dichtheitsklasse D nach DIN EN 12237

Rohrabbmessungen und Toleranzen nach EN 1506

