



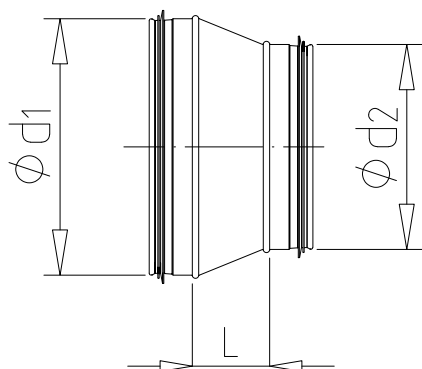

Beispiel für einen Produktcode

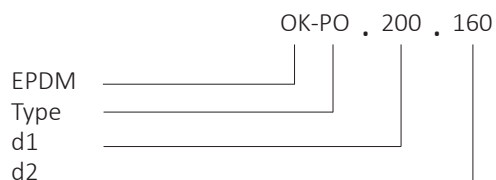

ød1 (mm)	ød2 (mm)	L (mm)	m (kg)	VPE
100	80*	50	0,18	96
125	80*	50	0,16	54
	100*	50	0,21	63
150	80	70	0,27	
	100	41	0,26	
	125	50	0,28	42
160	80	80	0,31	30
	100*	60	0,17	64
	125*	50	0,22	64
	150	50	0,31	30
180	80	100	0,40	
	100	80	0,39	
	125	55	0,37	
	150	50	0,38	
	160	50	0,39	
200	80	120	0,42	
	100*	100	0,22	28
	125*	75	0,30	25
	150	50	0,37	24
	160*	50	0,38	24
	180	50	0,44	26
224	100	124	0,50	
	125	99	0,48	150

*Übergänge in gepresster Ausführung hergestellt


Beschreibung

Reduzierstück mit doppelseitiger EPDM-Dichtung

Durchmesser D=315 und kleiner werden vorzugsweise als Pressformteile geliefert

Dichtheitsklasse D nach DIN EN 12237


Hergestellt nach EN 12237



ød1 (mm)	ød2 (mm)	L (mm)	m (kg)	VPE
224	150	74	0,46	
	160	64	0,44	28
	180	50	0,48	28
	200	50	0,45	30
250	100	150	0,71	20
	125*	125	0,69	28
	150	100	0,66	28
	160*	90	0,65	30
	180	70	0,66	
	200*	50	0,59	30
280	224	50	0,60	27
	160	120	0,79	16
	180	100	0,81	16
	200	80	0,73	16
	224	56	0,68	18
315	250	50	0,75	18
	160	155	0,98	16
	180	135	0,99	
	200	115	0,92	15
	224	91	0,87	18
355	250	65	0,88	16
	280	50	0,85	12
	200	155	1,15	12
	224	131	1,10	10
	250	105	1,11	10
400	280	75	1,03	10
	315	50	0,97	10
	200	200	1,50	30
	224	176	1,45	
	250	150	1,46	30
450	280	120	1,38	
	315	85	1,29	35
	355	50	1,18	42
	200	250	2,19	
	224	226	2,13	
500	250	200	2,12	12
	280	170	2,02	
	315	135	1,90	24
	355	95	1,74	20
	400	50	1,58	36
500	200	300	2,66	
	224	276	2,60	
	250	250	2,59	18

ød1 (mm)	ød2 (mm)	L (mm)	m (kg)	VPE
500	280	220	2,49	
	315	185	2,37	24
	355	145	2,21	12
	400	100	2,05	20
	450	50	1,86	14
560	250	310	3,29	
	280	280	3,19	
	315	245	3,07	
	355	205	2,91	
	400	160	2,75	
600	450	110	2,56	
	500	60	2,25	
	250	350	3,75	
	315	285	3,58	
	355	245	3,36	
630	400	200	3,20	
	450	150	3,01	
	500	100	2,70	
	560	50	2,43	
	315	315	3,87	
710	355	275	3,72	
	400	230	3,55	
	450	180	3,37	
	500	130	3,05	
	560	70	2,70	
800	600	50	2,56	
	355	355	6,43	
	400	310	6,18	
	450	260	5,88	
	500	210	5,43	
900	560	150	4,91	
	600	110	4,47	
	630	80	4,12	
	400	400	7,91	
	450	350	7,60	
900	500	300	7,16	
	560	240	6,64	
	600	200	6,20	
	630	170	5,85	
	710	90	5,41	
900	450	450	9,74	
	500	400	9,29	
	560	340	8,77	

*Übergänge in gepresster Ausführung hergestellt



ød1 (mm)	ød2 (mm)	L (mm)	m (kg)	VPE
900	630	270	7,98	
	710	190	7,54	
	800	100	6,28	
1000	500	500	13,47	
	560	440	12,87	
	630	370	11,96	
	710	290	11,37	
	800	200	9,93	
1120	900	100	8,08	
	560	560	16,42	
	630	490	15,52	
	710	410	14,93	
	800	320	13,48	
1250	900	220	11,64	
	1000	120	10,31	
	630	620	19,77	
	710	540	19,19	
	800	450	17,74	
	900	350	15,90	
	1000	250	14,57	
	1120	130	11,82	

