



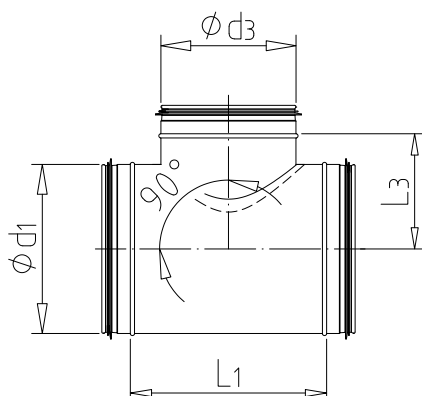

Dimensions

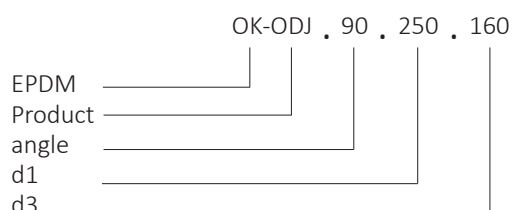

ød1 (mm)	ød3 (mm)	L1 (mm)	L3 (mm)	m (kg)	Packaging quantity
80	80*	159	89,5	0,32	48
100	80*	159	99,5	0,39	70
	100*	179	99,5	0,44	64
125	80*	159	112,5	0,44	44
	100*	179	112,5	0,53	90
	125*	204	112,5	0,62	60
150	80*	159	124,5	0,49	40
	100*	179	124,5	0,6	40
	125*	204	124,5	0,64	50
	150*	229	124,5	0,72	55
160	80*	159	129,5	0,51	60
	100*	179	129,5	0,63	120
	125*	204	129,5	0,67	50
	150*	229	129,5	0,84	60
	160*	239	129,5	0,79	39
180	80*	204	139,5	0,67	72
	100*	224	139,5	0,79	60
	125*	249	139,5	0,84	72
	150*	274	139,5	1,03	40
	160*	284	139,5	0,97	40
	180	304	162	1,18	40
200	80*	159	149,5	0,62	15


*T-pieces manufactured with pressed saddle

Description

Ends fitted with a double-edged EPDM seal

Tightness class ATC2 (D) according to EN 12237


Manufactured according to EN 12237



ød1 (mm)	ød3 (mm)	L ₁ (mm)	L ₃ (mm)	m (kg)	Packaging quantity
200	100*	179	149,5	0,78	60
	125*	204	149,5	0,9	60
	150*	229	149,5	0,92	36
	160*	239	149,5	0,99	54
	180	259	172	1,22	36
	200*	279	149,5	1,16	40
224	80*	159	161,5	0,69	
	100*	179	161,5	0,85	35
	125*	204	161,5	0,99	30
	150*	229	161,5	1,02	24
	160*	239	161,5	1,08	24
	180*	259	184	1,33	22
	200*	279	161,5	1,23	20
	224	303	161,5	1,19	18
250	80	159	174,5	1	36
	100*	179	174,5	1,13	24
	125*	204	174,5	1,27	36
	150*	229	174,5	1,3	24
	160*	239	174,5	1,39	36
	180	259	174,5	1,59	20
	200*	279	174,5	1,52	28
	224	303	174,5	1,55	18
280	125*	204	189,5	1,41	15
	160*	239	189,5	1,54	15
	180	259	212	1,57	12
	200*	279	189,5	1,69	15
	224	303	189,5	1,71	14
	250	329	189,5	1,88	14
	280	359	189,5	2,00	12
	315	394	207,5	2,12	10
315	125*	204	207,5	1,57	16
	160*	239	207,5	1,74	16
	180	259	230	1,76	12
	200*	279	207,5	1,94	14
	224	303	207,5	1,91	12
	250*	329	207,5	2,46	12
	280	359	207,5	2,22	10
	300*	379	207,5	3,02	8
355	160	239	227,5	1,8	8
	180	259	250	1,95	
	200*	279	227,5	2,17	8
	224	303	227,5	2,12	8

ød1 (mm)	ød3 (mm)	L ₁ (mm)	L ₃ (mm)	m (kg)	Packaging quantity
355	250*	329	227,5	2,7	8
	280	359	227,5	2,46	8
	315	394	227,5	2,65	8
	355	434	227,5	2,84	7
400	160	240	249,5	2,14	0
	180	260	271,5	2,74	
	200	280	249,5	2,37	
	224	304	249,5	2,5	
450	250	330	249,5	2,69	
	280	360	249,5	2,86	
	300	380	249,5	2,97	
	315	395	249,5	3,05	6
500	355	435	249,5	3,28	
	400	480	250	4,79	12
	160	240	274,5	2,84	
	180	260	296,5	3,05	
560	200	280	274,5	3,14	
	224	304	274,5	3,31	
	250	330	274,5	3,57	
	280	360	274,5	3,78	
600	300	380	274,5	3,93	
	315	395	274,5	4,04	
	355	435	274,5	4,33	
	400	480	275	4,73	
630	450	530	275	5,1	
	200	280	299,5	3,47	
	250	330	299,5	3,93	
	280	360	299,5	4,16	
660	300	380	299,5	4,32	
	315	395	299,5	4,44	
	355	435	299,5	4,76	
	400	480	300	5,19	
700	450	530	300	5,59	
	500	580	300	5,99	
	200	280	329,5	4,03	
	224	304	329,5	4,23	
750	250	330	329,5	4,52	
	280	360	329,5	4,78	
	300	380	329,5	4,96	
	315	395	329,5	5,09	
800	355	435	329,5	5,44	
	400	480	330	5,9	
	450	530	330	6,33	

*T-pieces manufactured with pressed saddle



ød1 (mm)	ød3 (mm)	L ₁ (mm)	L ₃ (mm)	m (kg)	Packaging quantity
560	500	580	330	6,77	
	560	640	330	7,38	
630	250	330	364,5	5,05	
	280	360	364,5	5,34	
	300	380	364,5	5,54	
	315	395	364,5	5,68	
	355	435	364,5	6,06	
	400	480	365	6,57	
	450	530	365	7,05	
	500	580	365	7,52	
	560	640	365	8,18	
	630	710	365	8,86	
710	355	435	404,5	9,5	
	400	480	405	10,24	
	450	530	405	10,94	
	500	580	405	11,64	
	560	640	405	12,58	
	600	680	405	13,15	
	630	710	405	13,59	
	710	790	405	15,01	
800	400	480	439	11,46	
	450	530	450	12,24	
	500	580	450	13,02	
	560	640	450	14,04	
	600	680	450	14,67	
	630	710	450	15,16	
	710	790	450	16,69	
	800	880	450	18,14	
900	450	530	500	13,69	
	500	580	500	14,56	
	560	640	500	15,68	
	630	710	500	16,91	
	710	790	500	18,57	
	800	880	500	20,17	
	900	980	500	21,94	
	1000	1080	500	23,94	
1000	500	580	550	19,03	
	560	640	550	20,41	
	630	710	550	21,93	
	710	790	550	23,94	
	800	880	550	25,89	
	900	980	550	28,06	
	1000	1080	550	30,72	
1120	560	640	610	22,77	

ød1 (mm)	ød3 (mm)	L ₁ (mm)	L ₃ (mm)	m (kg)	Packaging quantity
1120	630	710	610	24,45	
	710	790	610	26,65	
	800	880	610	28,79	
	900	980	610	31,17	
	1000	1080	610	34,04	
	1120	1200	610	36,98	
1250	630	710	675	27,2	
	710	790	675	29,6	
	800	880	675	31,97	
	900	980	675	34,59	
	1000	1080	675	37,68	
	1120	1200	675	40,89	
	1250	1330	675	44,39	

