


Dimensions

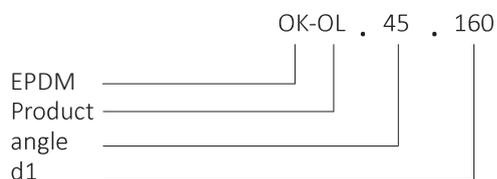

ϕd (mm)	L (mm)	m (kg)	Packaging quantity
80	41	0,16	50
100	41	0,21	60
125	52	0,29	225
150	62	0,42	138
160	66	0,44	115
180	75	0,65	85
200	83	0,63	60

Description

Pressed bend fitted with a double-edged EPDM seal.

Standard radius: $r = 1 \cdot d$

Tightness class ATC2 (D) according to EN 16798-3, EN 12237

Pipe dimensions and tolerances according to EN 1506

Fittings
with
gasketRectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material