


Dimensions

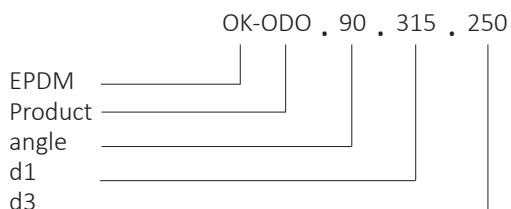

ϕd_1 (mm)	ϕd_3 (mm)	L_1 (mm)	L_3 (mm)	m (kg)	Packaging quantity
80	80	159	89,5	0,41	
100	80	159	99,5	0,47	
	100	179	99,5	0,53	
125	80	159	112,5	0,54	
	100	179	112,5	0,61	
	125	204	112,5	0,69	
150	80	159	124,5	0,62	
	100	179	124,5	0,69	
	125	204	124,5	0,77	
	150	229	124,5	0,86	
160	80	159	129,5	0,65	
	100	179	129,5	0,72	
	125	204	129,5	0,80	
	150	229	129,5	0,89	
	160	239	129,5	0,93	
180	100	224	139,5	0,89	
	125	249	139,5	0,99	
	150	274	139,5	1,08	
	160	284	139,5	1,11	
200	180	304	162	1,30	
	100	179	149,5	0,88	
	125	204	149,5	0,97	

d3=d4 => L3=L4

Description

Ends fitted with a double-edged EPDM seal

Tightness class ATC2 (D) according to EN 12237

Manufactured according to EN 12237

Fittings
with
gasket

Rectangular
accessories


Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material



ød1 (mm)	ød3 (mm)	L ₁ (mm)	L ₃ (mm)	m (kg)	Packaging quantity
200	150	229	149,5	1,07	
	160	239	149,5	1,11	
	180	259	172	1,29	
	200	279	149,5	1,29	
224	100	179	161,5	0,96	
	125	204	161,5	1,06	
	150	229	161,5	1,16	
	160	239	161,5	1,20	
	180	259	184	1,39	
	200	279	161,5	1,38	
250	224	303	161,5	1,49	
	100	179	174,5	1,16	
	125	204	174,5	1,27	
	150	229	174,5	1,38	
	160	239	174,5	1,42	
	180	259	197	1,61	
	200	279	174,5	1,61	
	224	303	174,5	1,72	
280	250	329	174,5	1,95	
	160	239	189,5	1,56	
	180	259	212	1,75	
	200	279	189,5	1,76	
	224	303	189,5	1,87	
	250	329	189,5	2,11	
315	280	359	189,5	2,26	
	160	239	207,5	1,73	
	180	259	230	1,93	
	200	279	207,5	1,95	
	224	303	207,5	2,06	
355	250	329	207,5	2,31	
	280	359	207,5	2,47	
	315	394	207,5	2,67	
	200	279	227,5	2,15	
	224	303	227,5	2,27	
	250	329	227,5	2,52	
	280	359	227,5	2,69	
400	315	394	227,5	2,90	
	355	434	227,5	3,13	
	200	280	249,5	2,50	
	224	304	249,5	2,64	
	250	330	249,5	2,90	
450	280	360	249,5	3,08	
	315	395	249,5	3,30	
	400	480	250	3,95	
	450	530	275	5,55	
500	500	580	300	6,44	
	250	330	299,5	4,17	
	280	360	299,5	4,42	
	315	395	299,5	4,71	
	355	435	299,5	5,03	
	400	480	300	5,55	
	450	530	300	5,98	
	560	640	330	7,86	
	315	395	329,5	5,35	
	355	435	329,5	5,70	
560	400	480	330	6,25	
	450	530	330	6,70	
	500	580	330	7,15	
	630	710	365	9,32	
	315	395	364,5	5,93	
	355	435	364,5	6,31	
	400	480	365	6,89	
	450	530	365	7,38	
	500	580	365	7,87	
	560	640	365	8,58	
630	630	710	365	9,32	
	355	435	404,5	9,81	
	400	480	405	10,65	
	450	530	405	11,35	
	500	580	405	12,05	
	560	640	405	13,03	
	630	710	405	14,05	
	710	790	405	15,83	
	400	480	450	11,85	
	450	530	450	12,62	
710	500	580	450	13,38	
	560	640	450	14,44	
	630	710	450	15,53	
	710	790	450	17,32	
	800	880	450	19,11	

d3=d4 => L3=L4

ød1 (mm)	ød3 (mm)	L ₁ (mm)	L ₃ (mm)	m (kg)	Packaging quantity
400	355	435	249,5	3,54	
	400	480	250	3,95	
450	200	280	274,5	3,30	
	224	304	274,5	3,48	
	250	330	274,5	3,81	
	280	360	274,5	4,04	
500	315	395	274,5	4,31	
	355	435	274,5	4,62	
	400	480	275	5,12	
	450	530	275	5,55	
	250	330	299,5	4,17	
	280	360	299,5	4,42	
560	315	395	299,5	4,71	
	355	435	299,5	5,03	
	400	480	300	5,55	
	450	530	300	5,98	
	500	580	300	6,44	
630	315	395	329,5	5,35	
	355	435	329,5	5,70	
	400	480	330	6,25	
	450	530	330	6,70	
	500	580	330	7,15	
710	560	640	330	7,86	
	315	395	364,5	5,93	
	355	435	364,5	6,31	
	400	480	365	6,89	
	450	530	365	7,38	
800	500	580	365	7,87	
	560	640	365	8,58	
	630	710	365	9,32	
	355	435	404,5	9,81	
	400	480	405	10,65	
800	450	530	405	11,35	
	500	580	405	12,05	
	560	640	405	13,03	
	630	710	405	14,05	
	710	790	405	15,83	
	400	480	450	11,85	
	450	530	450	12,62	
	500	580	450	13,38	
	560	640	450	14,44	
	630	710	450	15,53	
710	790	450	17,32		


Fittings
with
gasketRectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material

∅d1 (mm)	∅d3 (mm)	L ₁ (mm)	L ₃ (mm)	m (kg)	Packaging quantity
800	800	880	450	18,87	
900	450	530	500	14,04	
	500	580	500	14,89	
	560	640	500	16,03	
	630	710	500	17,21	
	710	790	500	19,09	
	800	880	500	20,66	
	900	980	500	22,53	
1000	500	580	550	19,37	
	560	640	550	20,75	
	630	710	550	22,20	
	710	790	550	24,43	
	800	880	550	26,30	
	900	980	550	28,41	
	1000	1080	550	31,60	
1120	560	640	610	23,06	
	630	710	610	24,66	
	710	790	610	27,05	
	800	880	610	29,08	
	900	980	610	31,33	
	1000	1080	610	34,53	
	1120	1200	610	37,57	
1250	630	710	675	27,35	
	710	790	675	29,92	
	800	880	675	32,14	
	900	980	675	34,58	
	1000	1080	675	37,94	
	1120	1200	675	41,01	
	1250	1330	675	44,56	

d3=d4 => L3=L4

