


Beispiel für einen Produktcode

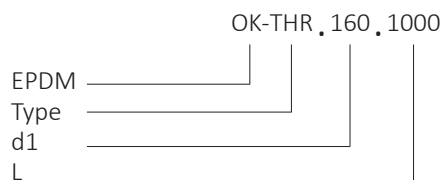

$\varnothing d1$ (mm)	a (mm)	b (mm)	L (mm)	m (kg)	VPE
80	180	90	500	2,35	
	180	90	1000	4,39	
100	210	160	500	3,09	
	210	160	1000	5,77	
125	240	180	500	3,63	
	240	180	1000	6,76	
160	280	220	500	4,53	
	280	220	1000	8,41	
200	330	250	500	5,45	
	330	250	1000	10,09	
250	390	310	500	7,25	
	390	310	1000	13,14	
315	450	370	500	9,66	
	450	370	1000	17,43	
400	550	460	500	12,57	
	550	460	1000	22,63	

Beschreibung

Außenmantel: Eckiges Rohr


Innenrohr aus Lochblech mit Textil

Material der Dämmschicht: Mineralwolle

Enden sind mit Einzel- oder Doppellippendichtung ausgerüstet (EPDM)

Dichtheitsklasse C nach DIN EN 12237

Hergestellt nach EN 12237



ød1 (mm)	L (mm)	Dämpfung [dB] nach Frequenz [Hz]							
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
100	500	3	9	9	18	22	50	22	14
	1000	10	16	16	33	50	50	42	24
125	500	5	6	7	16	28	38	17	11
	1000	7	12	14	32	50	50	31	18
160	500	5	5	7	15	26	23	11	9
	1000	7	7	12	25	48	39	18	13
200	500	4	3	6	13	24	17	9	7
	1000	10	5	12	24	43	30	14	12
250	500	6	3	5	12	20	12	6	6
	1000	9	5	8	21	38	21	10	10
315	500	4	2	4	11	17	8	5	6
	1000	7	4	7	18	32	14	9	10
400	500	3	2	4	10	12	6	6	5
	1000	5	3	6	16	24	10	8	8

Runde
Formteile mit
Lippendichtung

Eckiges Zubehör

Schalldämpfer

Regulierklappen

Verteilungs-
elementeAußen- und
EndelementeVerbindung
und Dichtungs-
werkstoffe