


Dimensions

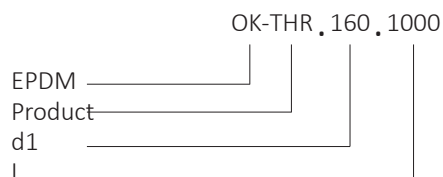

$\varnothing d1$ (mm)	a (mm)	b (mm)	L (mm)	m (kg)	Packaging quantity
80	180	90	500	2,35	
	180	90	1000	4,39	
100	210	160	500	3,09	
	210	160	1000	5,77	
125	240	180	500	3,63	
	240	180	1000	6,76	
160	280	220	500	4,53	
	280	220	1000	8,41	
200	330	250	500	5,45	
	330	250	1000	10,09	
250	390	310	500	7,25	
	390	310	1000	13,14	
315	450	370	500	9,66	
	450	370	1000	17,43	
400	550	460	500	12,57	
	550	460	1000	22,63	

Description

Outer casing: Rectangular duct

Inner tube made of perforated sheet metal with textile

Damping material: mineral wool

Ends fitted with a double-edged EPDM seal

Tightness class ATC3 (C) according to EN 12237

Manufactured according to EN 12237


Fittings
with
gasketRectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material

ød1 (mm)	L (mm)	Attenuation [dB] by frequency [Hz]							
		63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
100	500	3	9	9	18	22	50	22	14
	1000	10	16	16	33	50	50	42	24
125	500	5	6	7	16	28	38	17	11
	1000	7	12	14	32	50	50	31	18
160	500	5	5	7	15	26	23	11	9
	1000	7	7	12	25	48	39	18	13
200	500	4	3	6	13	24	17	9	7
	1000	10	5	12	24	43	30	14	12
250	500	6	3	5	12	20	12	6	6
	1000	9	5	8	21	38	21	10	10
315	500	4	2	4	11	17	8	5	6
	1000	7	4	7	18	32	14	9	10
400	500	3	2	4	10	12	6	6	5
	1000	5	3	6	16	24	10	8	8

Fittings
with
gasketRectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material