


Dimensions

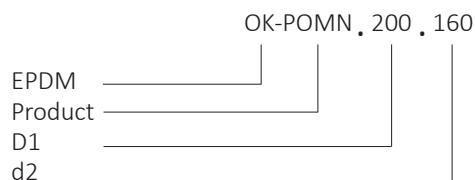

| øD1 (mm) | ød2 (mm) | L (mm) | m (kg) | Packaging quantity |
|-------------|-------------|-----------|-----------|-----------------------|
| 100 | 80 | 50 | 0,14 | |
| 125 | 80 | 50 | 0,21 | |
| 160 | 80 | 80 | 0,24 | |
| | 100 | 60 | 0,22 | |
| | 125 | 50 | 0,26 | |
| 200 | 100 | 100 | 0,38 | |
| | 125 | 75 | 0,37 | |
| | 160 | 50 | 0,34 | |
| 250 | 100 | 150 | 0,50 | |
| | 125 | 125 | 0,57 | |
| | 160 | 90 | 0,56 | |
| | 200 | 50 | 0,54 | |
| 315 | 160 | 155 | 0,79 | |
| | 200 | 115 | 0,83 | |
| | 250 | 65 | 0,75 | |
| 355 | 200 | 155 | 1,40 | |
| | 250 | 105 | 1,08 | |
| | 315 | 50 | 0,99 | |
| 400 | 200 | 200 | 1,33 | |
| | 250 | 150 | 1,33 | |
| | 315 | 85 | 1,29 | |
| | 355 | 50 | 1,20 | |

Description

Reducer fitted with female end and double-
-edged EPDM seal

Tightness class ATC2 (D) according to EN 12237

Manufactured according to EN 12237


Fittings
with
gasketRectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material

OK-POMN.D1.d2

| $\varnothing D1$ (mm) | $\varnothing d2$ (mm) | L (mm) | m (kg) | Packaging quantity |
|--------------------------|--------------------------|-----------|-----------|-----------------------|
| 450 | 250 | 200 | 2,30 | |
| | 315 | 135 | 2,00 | |
| | 355 | 95 | 1,90 | |
| | 400 | 50 | 1,60 | |
| 500 | 250 | 250 | 2,30 | |
| | 315 | 185 | 1,90 | |
| | 355 | 145 | 1,84 | |
| | 400 | 100 | 1,76 | |
| 560 | 450 | 50 | 1,80 | |
| | 400 | 160 | 3,10 | |
| | 450 | 110 | 2,70 | |
| 630 | 500 | 60 | 2,30 | |
| | 400 | 230 | 3,17 | |
| | 450 | 180 | 2,99 | |
| | 500 | 130 | 2,89 | |
| | 560 | 70 | 2,70 | |

Fittings
with
gasketRectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material