




Dimensions

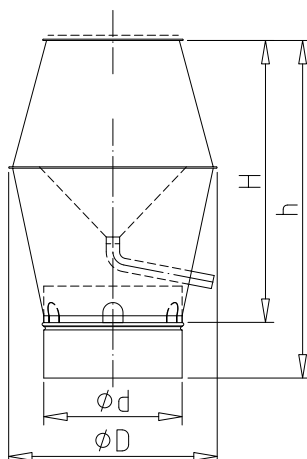

Ød (mm)	ØD (mm)	H (mm)	h (mm)	m (kg)	Packaging quantity
80	130	160	295	2,53	
100	180	220	355	2,82	
125	225	240	375	3,1	
150	261	314	449	3,54	
160	280	340	475	3,75	
180	305	374	509	4,08	
200	343	420	555	5,03	
224	385	474	609	5,12	
250	430	505	640	5,69	
280	480	584	719	6,62	
315	550	620	755	8,67	
355	615	704	839	10,31	
400	685	904	1039	13,34	
450	775	967	1102	23,03	
500	855	1054	1189	26,88	
560	955	1171	1306	32,85	
630	1070	1211	1346	41,77	
710	1215	1490	1625	54,75	
800	1360	1721	1856	75,48	
900	1420	1924	2059	88,64	

*Diameters D=450 and larger with lifting loops

*Diameters D=450 and larger in version with flange and counterflange



Description

The air outlet opening is secured by a protective net

Diameters D=400 and smaller are supplied with socked end

Manufactured according to EN 12237

Fittings
with
gasket

Rectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material

