



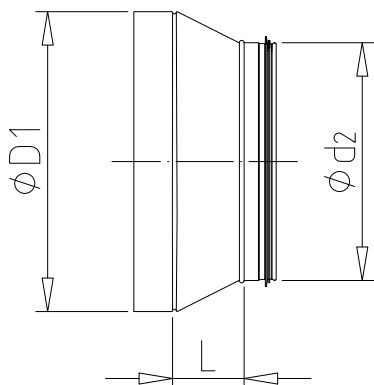

Dimensions

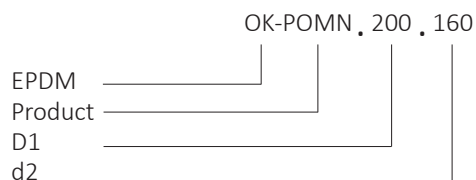


øD1 (mm)	ød2 (mm)	L (mm)	m (kg)	Packaging quantity
100	80	50	0,14	
125	80	50	0,21	
	100	50	0,19	
160	80	80	0,24	
	100	60	0,22	
	125	50	0,26	
200	100	100	0,38	
	125	75	0,37	
	160	50	0,34	
250	100	150	0,50	
	125	125	0,57	
	160	90	0,56	
	200	50	0,54	
315	160	155	0,79	
	200	115	0,83	
	250	65	0,75	
355	200	155	1,40	
	250	105	1,08	
	315	50	0,99	
400	200	200	1,33	
	250	150	1,33	
	315	85	1,29	
	355	50	1,20	

Description

Reducer fitted with female end and double-
-edged EPDM seal

Tightness class ATC2 (D) according to EN 12237

Manufactured according to EN 12237



$\varnothing D1$ (mm)	$\varnothing d2$ (mm)	L (mm)	m (kg)	Packaging quantity
450	250	200	2,30	
	315	135	2,00	
	355	95	1,90	
	400	50	1,60	
500	250	250	2,30	
	315	185	1,90	
	355	145	1,84	
	400	100	1,76	
560	450	50	1,80	
	400	160	3,10	
	450	110	2,70	
	500	60	2,30	
630	400	230	3,17	
	450	180	2,99	
	500	130	2,89	
	560	70	2,70	

Fittings
with
gasketRectangular
accessories

Silencers

Dampers

Air vents
and grids

Roof hoods

Fastening
material