




Dimensions

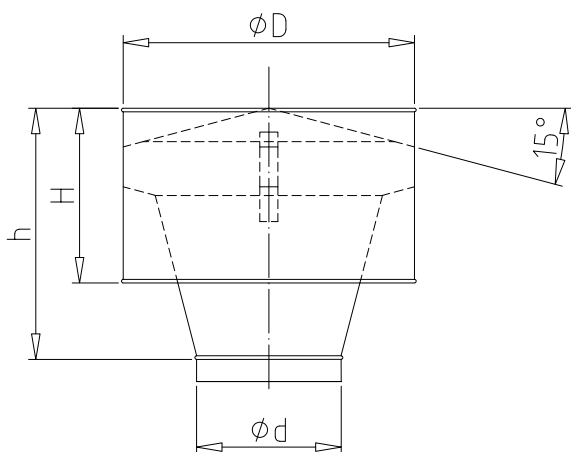

Description

Manufactured according to EN 12237

Supplied with male connection as standard

$\varnothing d$ (mm)	$\varnothing D$ (mm)	H (mm)	h (mm)	m (kg)	Packaging quantity
80	160	96	136	0,50	
100	200	120	170	0,70	
125	250	150	213	1,10	
150	300	180	255	1,50	
160	320	192	272	1,70	
180	360	216	306	2,10	
200	400	240	340	2,50	
224	448	269	381	3,20	
250	500	300	425	4,00	
280	560	336	476	5,00	
315	630	378	536	6,20	
355	710	426	604	9,40	
400	800	480	680	12,00	
450	900	540	765	17,60	
500	1000	600	850	21,60	

