



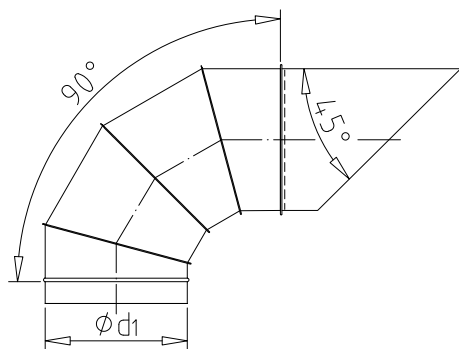

Dimensions

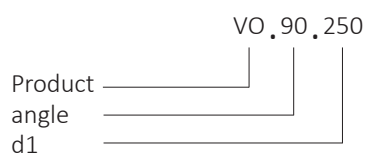

Ød1 (mm)	m (kg)
80	0,41
100	0,53
125	0,70
150	0,96
160	1,00
180	1,25
200	1,49
224	1,83
250	2,31
280	2,80
300	3,24
315	3,14
355	5,11
400	6,65
450	9,50
500	11,53
560	14,33
630	17,82
710	22,80
800	32,67

Description

The air outlet opening is secured by a protective net

Supplied with male connection as standard

Manufactured according to EN 12237

