



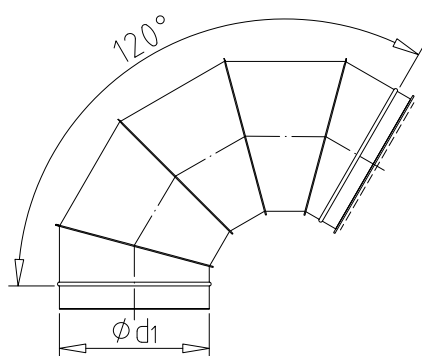

Dimensions

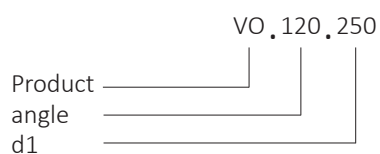

Ød1 (mm)	m (kg)
80	0,60
100	0,72
125	1,13
150	1,52
160	1,60
180	1,95
200	2,47
224	2,88
250	3,50
280	4,41
315	5,32
355	7,80
400	10,11
450	14,43
500	17,40
560	21,55
630	26,74

Description

The air outlet opening is secured by a protective net

Supplied with male connection as standard

Manufactured according to EN 12237

