



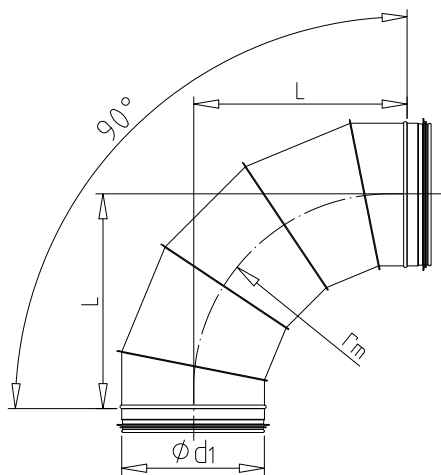

### Beispiel für einen Produktcode

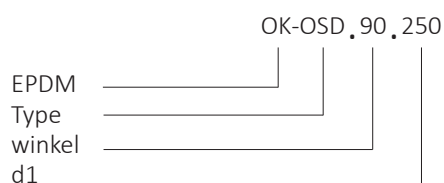

| Ød1<br>(mm) | L<br>(mm) | m<br>(kg) | Segment-<br>menge | VPE |
|-------------|-----------|-----------|-------------------|-----|
| 125         | 190       | 0,70      | 5                 |     |
| 150         | 225       | 0,90      | 5                 |     |
| 160         | 240       | 1,00      | 5                 |     |
| 180         | 270       | 1,40      | 5                 |     |
| 200         | 300       | 1,60      | 5                 |     |
| 224         | 336       | 1,90      | 5                 |     |
| 250         | 375       | 2,40      | 5                 |     |
| 280         | 420       | 3,00      | 5                 |     |
| 315         | 473       | 3,70      | 5                 |     |
| 355         | 533       | 4,60      | 5                 |     |
| 400         | 600       | 5,90      | 5                 |     |
| 450         | 675       | 8,80      | 5                 |     |
| 500         | 750       | 10,70     | 5                 |     |
| 560         | 840       | 15,50     | 5                 |     |
| 630         | 945       | 19,40     | 5                 |     |
| 710         | 1065      | 24,80     | 5                 |     |
| 800         | 1200      | 35,50     | 5                 |     |

### Beschreibung

Segmentbogen mit Einzel- oder Doppellippen-  
dichtungsausrüstung (EPDM)

Verlängert radius:  $r = 1,5 \cdot d$

Dichtheitsklasse D nach DIN EN 12237

Rohrabmessungen und Toleranzen nach EN 1506

