



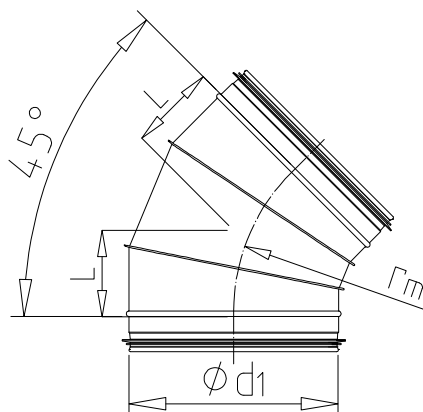

Popis kódu produktu

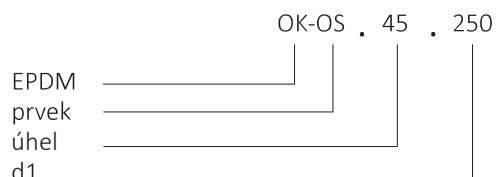

Ød (mm)	L (mm)	m (kg)	Počet segmentů	Balící množství
200	82	0,66	3	60
224	92	0,79	3	39
250	103	1,16	3	30
280	115	1,38	3	19
300	123	1,53	3	16
315	129	1,67	3	14
355	146	2,02	3	12
400	165	2,58	3	24
450	185	3,85	3	20
500	206	4,57	3	16
560	231	5,68	3	
600	248	6,36	3	
630	260	6,90	3	
710	293	11,74	3	
800	330	14,35	3	
900	371	17,56	3	
1000	412	24,64	3	
1120	462	29,97	3	
1250	516	36,31	3	

Popis produktu

Segmentový oblouk osazený dvoubřítým EPDM těsněním.

Standardní rádius: $r = 1 \cdot d$

Třída těsnosti ATC2 (D) dle EN 16798-3, EN 12237

Rozměry a tolerance potrubí dle EN 1506

