



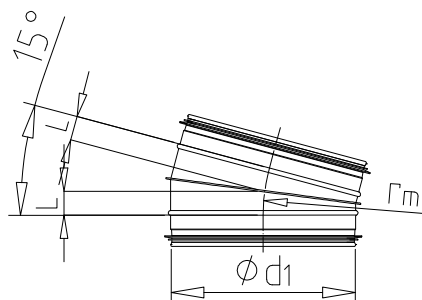

Popis kódu produktu

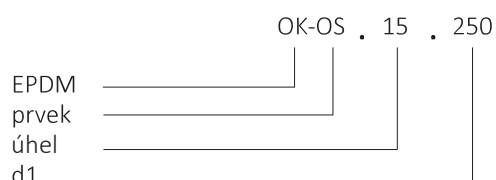

Ød (mm)	L (mm)	m (kg)	Počet segmentů	Balící množství
200	33	0,39	2	24
224	36	0,45	2	30
250	38	0,69	2	24
280	41	0,80	2	16
300	45	0,87	2	
315	46	0,95	2	28
355	48	1,11	2	24
400	53	1,44	2	15
450	59	2,07	2	12
500	67	2,40	2	10
560	74	2,98	2	
630	83	3,53	2	
710	93	6,07	2	
800	105	7,21	2	
900	118	8,58	2	
1000	132	12,23	2	
1120	147	14,48	2	
1250	165	17,11	2	

Popis produktu

Segmentový oblouk osazený dvoubřítým EPDM těsněním.

Standardní rádius: $r = 1 \cdot d$

Třída těsnosti ATC2 (D) dle EN 16798-3, EN 12237

Rozměry a tolerance potrubí dle EN 1506

