



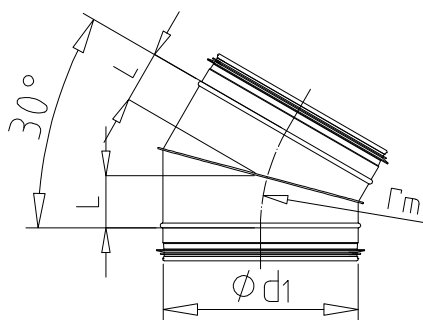

Popis kódu produktu

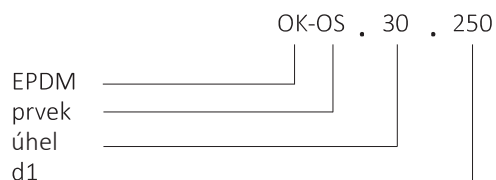

Ød (mm)	L (mm)	m (kg)	Počet segmentů	Balící množství
200	54	0,51	2	36
224	60	0,60	2	24
250	68	0,90	2	36
280	76	1,06	2	30
300	81	1,18	2	
315	85	1,28	2	20
355	96	1,54	2	15
400	108	1,98	2	10
450	122	2,89	2	20
500	135	3,41	2	
560	151	4,25	2	
630	170	5,13	2	
710	191	8,78	2	
800	215	10,65	2	
900	242	12,93	2	
1000	269	18,28	2	
1120	301	22,06	2	
1250	337	26,56	2	

Popis produktu

Segmentový oblouk osazený dvoubřítým EPDM těsněním.

Standardní rádius: $r = 1 \cdot d$

Třída těsnosti ATC2 (D) dle EN 16798-3, EN 12237

Rozměry a tolerance potrubí dle EN 1506

